


WIRELESS ROUTER TENDA TX2L PRO AX1500/2.4:300MBPS&5GHZ:1201MBPSI/3XGLAN/1XGBWAN MU-MIMO

Naziv: WIRELESS ROUTER TENDA TX2L PRO
AX1500/2.4:300MBPS&5GHZ:1201MBPSI/3XGLAN/1XGBWAN
MU-MIMO

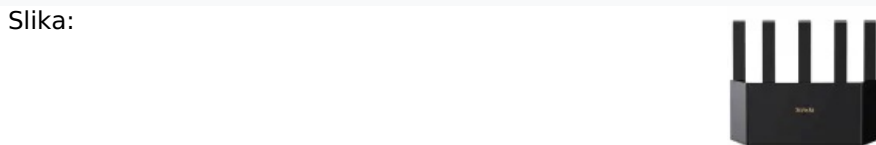

Šifra: #BM346901735790581067

Barkod: 6932849424201

Proizvođač: TENDA

Detalji

Kategorija: RUTERI

Oznake: NOVO

Atributi:

Cena

Cena sa PDV: 7,490.00 RSD *WEB CENA
8,239.00 RSD *Cena za odloženo web plaćanje

Ostalo

Opis:

Wi-Fi standardi	IEEE 802.11ax/ac/a/n 5GHz, IEEE 802.11ax/b/g/n 2.4GHz, Beamforming, MU-MIMO
Ostali standardi	IEEE 802.3, IEEE 802.3u, IEEE 802.3ab
Ujedinjenje Wi-Fi mreža	Da, moguće je ujediniti 2,4 GHz i 5 GHz u jednu Wi-Fi mrežu
Frekvencija i EIRP	2.4G: 2412-2472MHz (CH1-CH13), 5G: 5180-5240MHz (CH36-CH64), <20 dBm (2.4 GHz), <23 dBm (5 GHz)
Sigurnost Wi-Fi	WPA3-SAE, WPA-PSK, WPA2-PSK, WPA/WPA2-PSK, WPS (Wi-Fi Protected Setup)
Bežični režimi	Wireless Router, AP mode, Universal Repeater (Client+AP, WISP)
Brzina prenosa	5GHz: do 1201Mb/s, 2.4GHz: do 300Mb/s

Interfejs	1x Gigabit WAN (10/100/1000 Mb/s), 3x Gigabit LAN (10/100/1000), 1x dugme WPS/Reset
DHCP	DHCP Server, DHCP Client List, DHCP Static IP Address Reservation and Assignment
Povezivanje na Internet	Dynamic IP, Static IP, PPPoE, Unifi, Maxis, Maxis-special, Celcom, Digi, Manual
Virtuelni server	Port Forwarding, DMZ Host, UPnP
Sigurnost	Filtrovane klijenata, roditeljska kontrola
DDNS	No-ip, 88ip, Oray.com, DynDNS
VPN	IPSec Transparent Transmission, PPTP Transparent Transmission, L2TP Transparent Transmission, PPTP VPN Server, PPTP VPN Client, L2TP VPN Client
Način upravljanja	HTTP, Daljinsko web upravljanje, SMART aplikacija za mobilni telefon
Specijalne funkcije	Wi-Fi+ Mesh, Smart Traffic Prioritisation, Smart Wi-Fi Schedule, Smart LED On/Off, Tenda Cloud
Firewall	ICMP Flood Attack Defense, TCP Flood Attack Defense, UDP Flood Attack Defense, Ignore Ping Packet From WAN Port
Firewall i ostalo	IPv6, IPTV, Mreža za goste, VLAN, Kontrola propusnog opsega, MAC Clone, Static Routing, System Log, Network Time, Backup/Restore Settings, online ažuriranja firmvera
LED indikacija	1x Sys
Antena	5x 6 dBi
Provedba	indoor, desktop
Napajanje	12 V DC, 1A
Hlađenje	Pasivno
Radna temperatura	0° do 40 °C
Dimenzije (v x š x d)	244