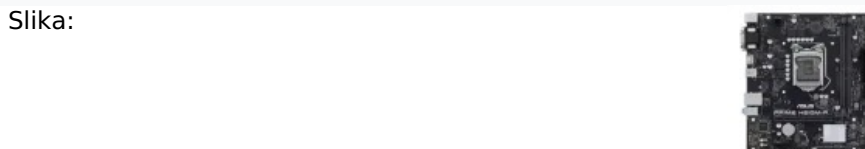


**MATIČNA PLOČA 1200 ASUS PRIME H510M-R-SI VGA/DVI/HDMI**Naziv: MATIČNA PLOČA 1200 ASUS PRIME H510M-R-SI  
VGA/DVI/HDMI

Šifra: #BM7611801736308876856

Barkod: 4711081299394

Proizvođač: ASUS

**Detalji**

Kategorija: MATIČNE PLOČE

Oznake: [Proveri dostupnost](#)Atributi: PROCESORSKO LEŽIŠTE: LGA 1200  
CHIPSET: H510  
PODRŽANA MEMORIJA: DDR4**Cena**Cena sa PDV: 8,990.00 RSD \*WEB CENA  
9,889.00 RSD \*Cena za odloženo web plaćanje**Ostalo**

Opis:	Tip procesora	Intel
	Podnožje	Intel® 1200
	Čipset	Intel H510
	Format ploče	Micro ATX
	Podržani procesori	Intel® Socket 1200 for 10th Gen Intel® Core™, Pentium® Gold and Celeron® Processors * Supports Intel® 14 nm CPU Supports Intel® Turbo Boost Technology 2.0 and Intel® Turbo Boost Max Technology 3.0** * Refer to www.asus.com for CPU support list **Intel® Turbo Boost Max Technology 3.0 support depends on the CPU types.
	Podržana memorija	DDR4
		2 x DIMM, Max. 64GB, DDR4 2933/2800/2666/2400/2133 MHz

Memorija	Non-ECC, Un-buffered Memory * Dual Channel Memory Architecture Supports Intel® Extreme Memory Profile (XMP) OptiMem * 10th Gen Intel® Core™ i9/i7 CPUs support 2933/2800/2666/2400/2133 natively, Refer to <a href="http://www.asus.com">www.asus.com</a> for the Memory QVL (Qualified Vendors Lists).
Integrirana grafička karta	Integrated Graphics Processor * 1 x D-Sub 1 x DVI-D 1 x HDMI 1.4b *Graphics specifications may vary between CPU types.
Slotovi za proširenje	Intel® 10th Gen Processors 1 x PCIe 3.0 x16 (x16 mode) Intel® H410 Chipset 2 x PCIe 3.0 x1
Storage	Total supports 1 x M.2 slots and 4 x SATA 6Gb/s ports Intel® H410 Chipset : 1 x M.2 Socket 3, with M Key, type 2242/2260/2280 storage devices support (SATA & PCIE 3.0 X2 mode)*1 4 x SATA 6Gb/s port(s)
Mrežna karta	Realtek® RTL8111H
Zvučna karta	Realtek ALC887 7.1-Channel High Definition Audio CODEC *2 - Supports : Jack-detection, Multi-streaming, Front Panel Jack-retasking, up to 24-Bit/192kHz playback Audio Feature : - LED-illuminated design - Audio Shielding - Dedicated audio PCB layers - Premium Japanese audio capacitors
USB	Rear USB Port ( Total 4 ) 2 x USB 3.2 Gen 1 port(s)(2 x Type-A) 2 x USB 2.0 port(s)(2 x Type-A) Front USB Port ( Total 6 ) 2 x USB 3.2 Gen 1 port(s) 4 x USB 2.0 port(s)
Konektori na zadnjoj strani	1 x PS/2 keyboard (purple) 1 x PS/2 mouse (green) 1 x DVI-D 1 x D-Sub 1 x HDMI 1 x LAN (RJ45) port(s) 2 x USB 3.2 Gen 1 Type-A 2 x USB 2.0 3 x Audio jack(s)
Interni konektori	1 x CPU Fan connector(s) 2 x Chassis Fan connector(s) 1 x USB 3.2 Gen 1(up to 5Gbps) connector(s) support(s) additional 2 USB 3.2 Gen 1 port(s) 2 x USB 2.0 connector(s) support(s) additional 4 USB 2.0 port(s) 1 x M.2 Socket 3 with M Key, type 2242/2260/2280 storage devices support (SATA & PCIE 3.0 X2 mode) 1 x SPI TPM header 1 x COM port(s) connector(s) 4 x SATA 6Gb/s connector(s) 1 x S/PDIF out header(s) 1 x 24-pin EATX Power connector(s) 1 x 8-pin EATX 12V Power connectors 1 x Front panel audio connector(s) (AAFP) 1 x Clear CMOS jumper(s) 1 x System panel connector 1 x Speaker connector
Bios	128 Mb Flash ROM, UEFI AMI BIOS

