


NETIS N3D AC1200 DUAL BAND 2.4+5GHZ WI-FI ROUTER 1W/3LAN 10/100, 4X5DBI, HI POWER, CLIENT,MULTI-SSID

Naziv: NETIS N3D AC1200 DUAL BAND 2.4+5GHZ WI-FI ROUTER 1W/3LAN 10/100, 4X5DBI, HI POWER, CLIENT,MULTI-SSID

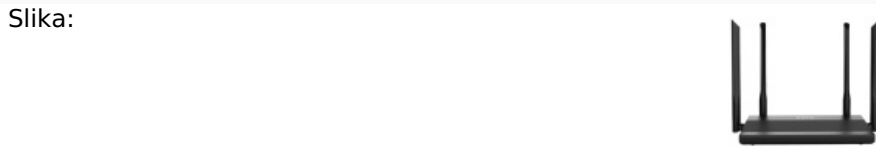

Šifra: #BM11296901739881340692

Barkod: 6972012671377

Proizvođač: NETIS

Detalji

Kategorija: RUTERI

Oznake: [Proveri dostupnost](#)

Atributi:

Cena

Cena sa PDV: 3,403.23 RSD *WEB CENA
3,743.55 RSD *Cena za odloženo web plaćanje

Ostalo

Opis:

AC1200 Wireless Dual Band RouterThe NETIS router N3D equipped with 802.11AC Wi-Fi technology, will offer you simultaneous dual band connection with 867Mbps wireless speeds over the crystal clear 5GHz band and 300Mbps over the 2.4GHz band, ideal for faster downloading, online gaming, Internet calling and HD video streaming.

Wireless Standards IEEE 802.11b/g/n 2.4GHz IEEE 802.11a/n/ac 5GHz

Signal Rate Up to 300Mbps 2.4GHz UP to 867Mbps 5GHz

Frequency Range 2.4-2.4835GHz; 5.180-5.825GHz

Transmit Power 20dBm(MAX)

Data Transfer Rate 802.11ac:80MHZ(433Mbps, 867Mbps) 802.11n: 40MHz(300Mbps, 270Mbps, 240Mbps, 180Mbps, 120Mbps, 90Mbps, 60Mbps, 30Mbps) 20MHz (144Mbps, 130Mbps, 115Mbps, 86Mbps, 57Mbps, 43Mbps, 28Mbps, 14Mbps) (Auto- Sense) 802.11g:(54Mbps, 48Mbps, 36Mbps, 24Mbps, 18Mbps, 12Mbps, 11Mbps, 9Mbps, 6Mbps) 802.11b:(11Mbps,9Mbps, 6Mbps, 5.5Mbps, 2Mbps, 1Mbps)

Wireless Modes AP, Client, Multi-SSID

Wireless Security WEP/WPA-PSK/WPA2-PSK Encryption

Wireless MAC Filtering

Hardware Standards IEEE 802.3 10Base-T, IEEE 802.3u 100Base-TX, IEEE 802.3ab 1000Base-T

Interface 1*10/100/100Mbps Auto MDI/MDIX RJ45 WAN port 3*10/100/100Mbps Auto MDI/MDIX RJ45 LAN port

LED Indicators PER?

Internet Buttons Reset

Antenna 4* external fixed 5dBi antenna

Power Supply DC 12V/1.0A(Output)

Dimensions (L x W x H) 182mm x 108mm x 25mm

Software WAN Type DHCP, Static IP, PPPoE, L2TP, PPTP Others Bandwidth Control, Access Control, IPTV, Virtual Server, DMZ, VPN Pass-through, Dynamic DNS, Static Routing, Backup & Restore

Certification FCC, CE, EAC

Environment Operating Temperature: 0?~40? Storage Temperature: -40?~70? Operating Humidity: 10%~90% non-condensing Storage Humidity: 5%~90% non-condensing

Package 1* N3D 1* 12V/1.0A Power Adapter 1* Quick Installation Guide (Multilingual)